


EXPLOSION PROOF DIFFERENTIAL PRESSURE SWITCH

Special Features:

Field Adjustable
Compact and Reliable
Snap Action Microswitch with Piston

Specifications:

Sensor	: AISI 316L SS Piston
Wetted Parts	: AISI 316LSS
Enclosure	: SS304, Weatherproof to IP 65
Ambient temperature	: - 40°C to + 80°C
Process temperature	: -40 to 120°C
Operating pressure	: 75% of the Scale Value
Process Media	: Air, Oil and Water

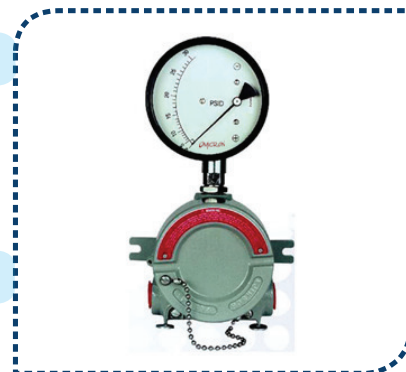

Scale Accuracy	: $\pm 2\%$ of F.S.R
Repeatability	: $\pm 0.5\%$ of F.S.R
Max Static Pressure	: 25 Bar, 200 Bar, 450 Bar or 700 Bar
Process Connection	: 1/4" BSP (F)
Mounting	: In Line Mounting / Panel / Back / Bottom Entry
Switch	: 1 SPDT or 2 SPDT, Magnetic Reed Switch
Contact Rating	: 15VA, 0.5A, 125VAC / 200VDC : 100VA, 2.0A, 230VAC / 300VDC
Dial Size	: 2.5", 4", 6"
Standard Ranges	: 0... 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 10 bar Other ranges available on demand

Dimension:

